



CTEK MXS 5.0

5 A



ADVANCED CHARGING WITH TEMPERATURE COMPENSATION CTEK MXS 5.0

The MXS 5.0 is an advanced microprocessor controlled battery charger with automatic temperature compensation built in providing unrivalled performance on batteries from 1.2Ah up to 110Ah. The MXS 5.0 solves a broad range of battery problems and is the ideal charger for the user with high demands. Features of the MXS 5.0 include diagnosis of battery condition to establish if it can receive and retain charge, patented automatic desulphation programme and a special reconditioning function that will revive and restore deeply discharged and stratified batteries. AGM mode is perfect for maximising performance and life of most Stop-Start batteries. The built in temperature compensation ensures ideal charging performance even in the most extreme conditions. Patented Float/Pulse maintenance makes the MXS 5.0 ideal for long-term maintenance. The entire process of battery testing, charging and maintenance is easily followed on the clear LED display.

The MXS 5.0 is a fully automatic 'connect and forget' 12V charger with 8 charging steps and offers selectable 0.8A, and 5A programmes. The RECOND and AGM modes operate individually or together in both 0.8A and 5.0A programmes providing great flexibility for the user. Wide charging range on all lead-acid battery types from 1.2Ah up to 110Ah with additional maintenance capability to 160Ah. Splash proof and dust proof (IP65). The MXS 5.0 is easy and safe to use, protects vehicle electronics, is spark-free, reverse polarity protected and short circuit proof. The MXS 5.0 features a 5 year warranty.

TECHNICAL DATA

CHARGING VOLTAGE	14.4/14.7/15.8 V
CHARGING CURRENT	Max 5 A
TYPE OF CHARGER	8 step, fully automatic charging cycle
TYPE OF BATTERY	12 V lead-acid batteries
BATTERY CAPACITY	1.2-110 Ah, up to 160 Ah for maintenance
INSULATION	IP65 (splash and dust proof)
TEMPERATURE COMP.	Built In



Fully automatic for optimal charging



For all lead-acid batteries



FULLY CHARGED BATTERY



Maintenance charging



PROGRAM for charging small batteries



PROGRAM for charging normal batteries

AGM

OPTION for charging AGM and Stop-Start Batteries.

RECOND

OPTION for reconditioning deeply discharged batteries



THE SMARTEST BATTERY CHARGERS IN THE WORLD



CTEK MXS 5.0

5 A



Complete Battery Care – unique and patented system to recover, charge and maintain all lead-acid battery types to maximise performance and extend life.

Safe and easy to use – User safety through spark free operation and reverse polarity protection. Vehicle electrical safety through exceptionally clean voltage and current delivery with no surges or spikes. No need to disconnect battery from the vehicle when charging.

Connect and Forget – simple plug and play operation. Select the program and mode and leave the charger to do the rest.

Unique 8 Step Charging – the patented 8 step programme tests battery condition and revives, charges and maintains to ensure maximum battery life and performance. RECOND recovers deep discharged and stratified batteries. FLOAT/PULSE maintenance ensures ideal battery care during periods of inactivity.


Temperature Compensation – built in automatic charge voltage compensation depending on ambient temperature ensures ideal charging in extreme cold or hot weather conditions.

Extends battery life – the unique features of CTEK chargers combine to ensure maximum battery reliability, performance and life.

MULTIPLE CHARGING PROGRAMS and OPTIONS


1. Connect the charger to the battery.
2. Connect the charger to the wall socket.
3. Continue to press the MODE-button to combine charging program or with charging options AGM OPTION and/or **RECOND** RECOND OPTION.

Press and release the MODE button several times until the desired combination of charging program (M/C, CAR) and option (RECOND, AGM) is lit.

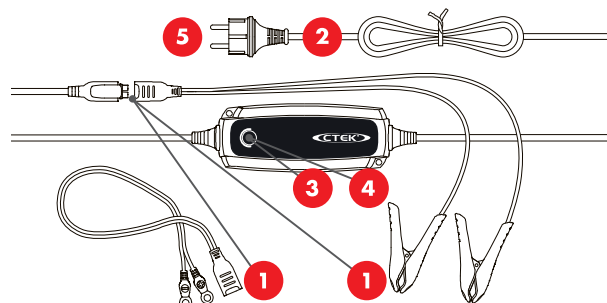

4. Follow the 8-step display through the charging process. The battery is ready to start the engine when STEP 4 is lit. The battery is fully charged when STEP 7 is lit.
5. Stop charging at any time by disconnecting the mains cable from the wall socket.

UNIQUE 8 STEP CHARGING FROM CTEK

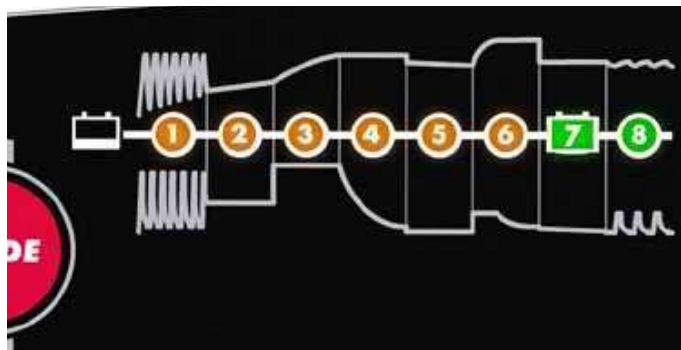

1 STEP 1 DESULPHATION

Tests if the battery can accept charge. This step prevents charging from proceeding on a defective battery.

2 STEP 2 SOFT START

Charging with maximum current until approximately 90% battery capacity.

3 STEP 3 BULK

Charging with declining current to maximize up to 95% battery capacity.

4 STEP 4 ABSORPTION, BATTERY READY TO USE

Tests if the battery can hold charge. Batteries that can not hold charge may need to be replaced.

5 STEP 5 ANALYSE

Final charge with reduced current up to approximately 98% battery capacity.

6 STEP 6 RECOND

Final charge with maximum voltage up to 100% battery capacity.

7 STEP 7 FLOAT, BATTERY FULLY CHARGED

Maintaining the battery voltage at maximum level by providing a constant voltage charge.

8 STEP 8 PULSE, MAINTENANCE CHARGING

Maintaining the battery at 95-100% capacity. The charger monitors the battery voltage and gives a pulse when necessary to keep the battery fully charged.

GUARANTEED QUALITY WITH CTEK

CTEK customer support is available to answer any questions related to charging and CTEK chargers. Safety, simplicity and flexibility characterizes all products and solutions developed and sold by CTEK. CTEK supply chargers to more than 60 countries throughout the world. CTEK is also a reliable OEM supplier to many of the world's most prestigious car and motorcycle manufacturers.

Contact customer support: info@ctek.com